
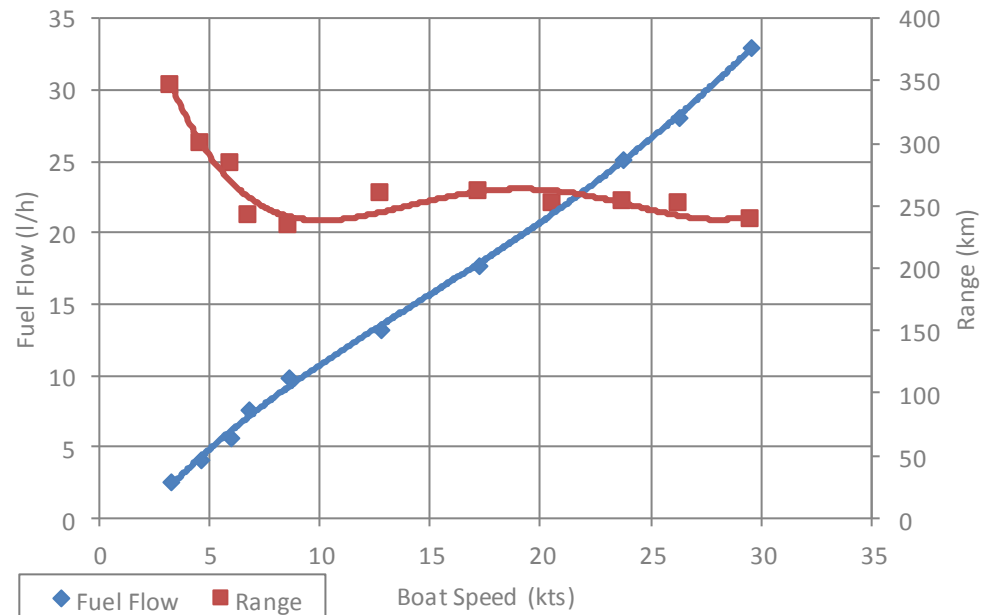


Model 605 Open  
 Engine(s) Mercury 100 Four Stroke  
 HP / kW 100 / 73.6  
 Gear Ratio 2.07:1  
 Propeller Spitfire 13.8 x 13 x 4 BL AL  
 Propeller PN 8M8026570

Dry Weight 1160 kg  
 Test Weight 1494 kg

| RPM  | Speed (kts) | Fuel Flow (l/h) | Range (km) |
|------|-------------|-----------------|------------|
| 1000 | 3.3         | 2.5             | 347        |
| 1500 | 4.6         | 4.1             | 299        |
| 2000 | 6.0         | 5.6             | 283        |
| 2500 | 6.8         | 7.5             | 242        |
| 3000 | 8.6         | 9.8             | 234        |
| 3500 | 12.8        | 13.1            | 260        |
| 4000 | 17.2        | 17.6            | 261        |
| 4500 | 20.6        | 21.8            | 251        |
| 5000 | 23.8        | 25.1            | 252        |
| 5500 | 26.4        | 28.0            | 251        |
| 6050 | 29.6        | 33.0            | 239        |

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.


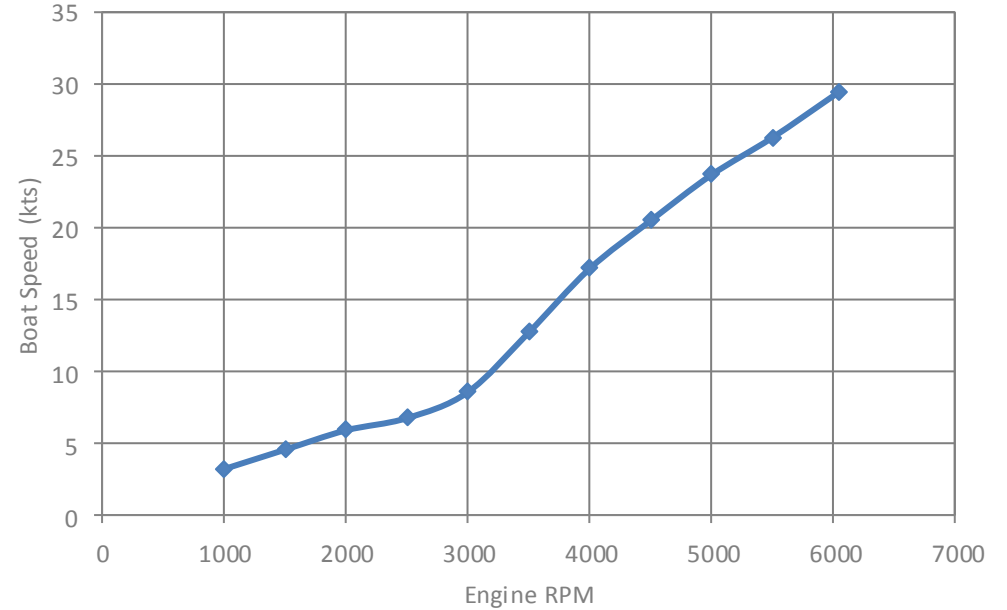


Model 605 Open  
 Engine(s) Mercury 115 Four Stroke  
 HP / kW 115 / 84.6  
 Gear Ratio 2.07:1  
 Propeller Spitfire 13.4 x 15 x 4 BL AL  
 Propeller PN 8M8026580

Dry Weight 1160 kg  
 Test Weight 1494 kg

| RPM  | Speed (kts) | Fuel Flow (l/h) | Range (km) |
|------|-------------|-----------------|------------|
| 1000 | 3.6         | 2.7             | 351        |
| 1500 | 4.9         | 3.8             | 344        |
| 2000 | 6.2         | 5.8             | 285        |
| 2500 | 7.1         | 8.4             | 224        |
| 3000 | 9.8         | 11.9            | 219        |
| 3500 | 15.1        | 13.2            | 305        |
| 4000 | 19.2        | 17.9            | 286        |
| 4500 | 22.8        | 23.9            | 254        |
| 5000 | 26.3        | 28.8            | 243        |
| 5500 | 29.4        | 39.6            | 198        |
| 6040 | 33.0        | 44.5            | 197        |

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

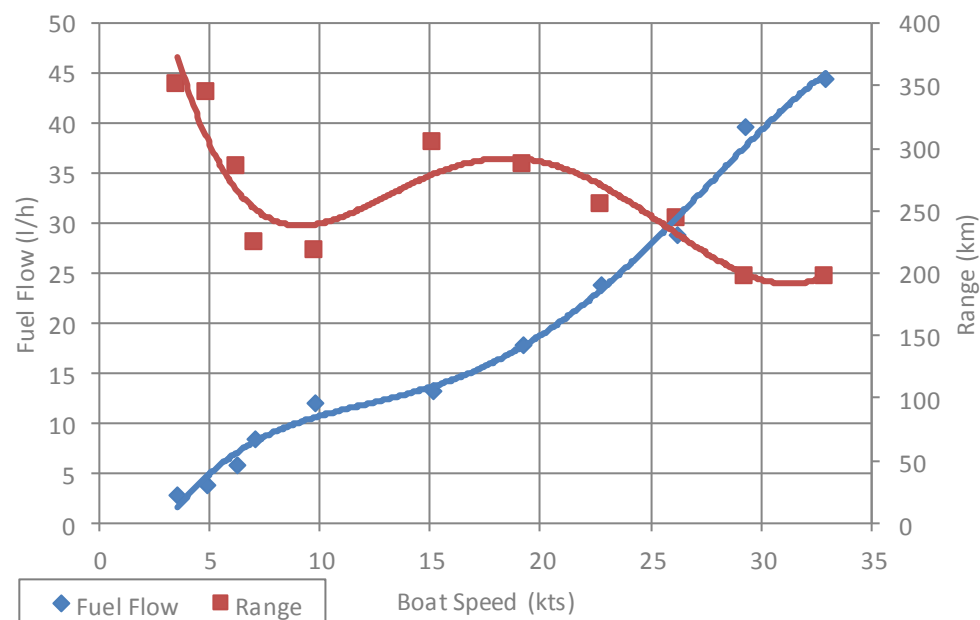
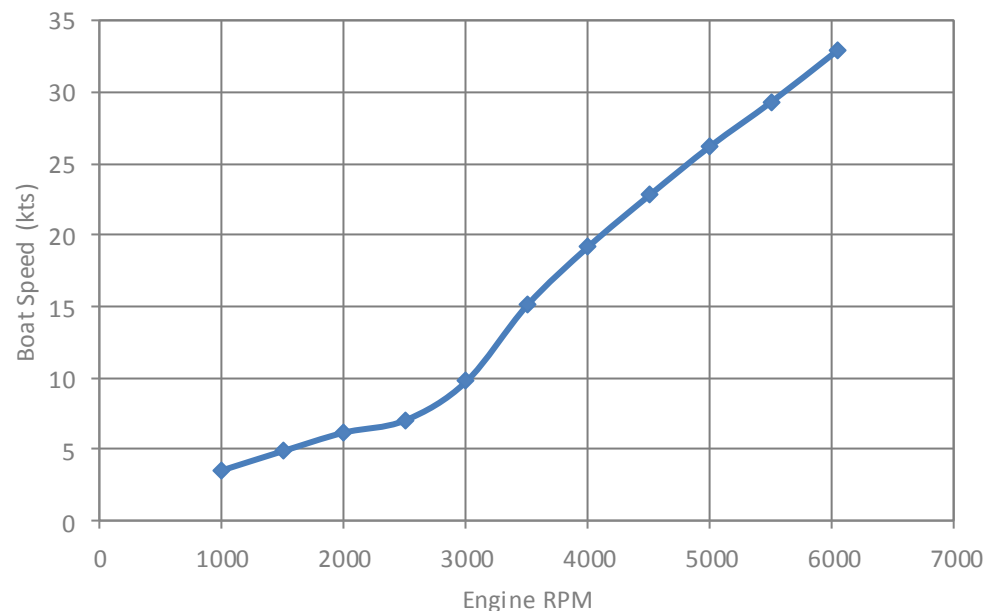


Model 605 Open  
 Engine(s) Mercury 115 Four Stroke Command Thrust  
 HP / kW 115 / 84.6  
 Gear Ratio 2.38:1  
 Propeller Black Max 14 1/2 x 19 x 3 BL AL  
 Propeller PN 832830A45

Dry Weight 1162 kg  
 Test Weight 1496 kg

| RPM  | Speed (kts) | Fuel Flow (l/h) | Range (km) |
|------|-------------|-----------------|------------|
| 1000 | 3.9         | 2.7             | 385        |
| 1500 | 5.2         | 3.8             | 365        |
| 2000 | 6.5         | 6.1             | 284        |
| 2500 | 7.7         | 8.6             | 239        |
| 3000 | 10.4        | 11.6            | 238        |
| 3500 | 16.5        | 14.9            | 294        |
| 4000 | 20.6        | 19.6            | 280        |
| 4500 | 24.5        | 26.9            | 243        |
| 5000 | 27.7        | 30.6            | 241        |
| 5500 | 30.8        | 38.5            | 213        |
| 6050 | 35.3        | 43.7            | 215        |

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

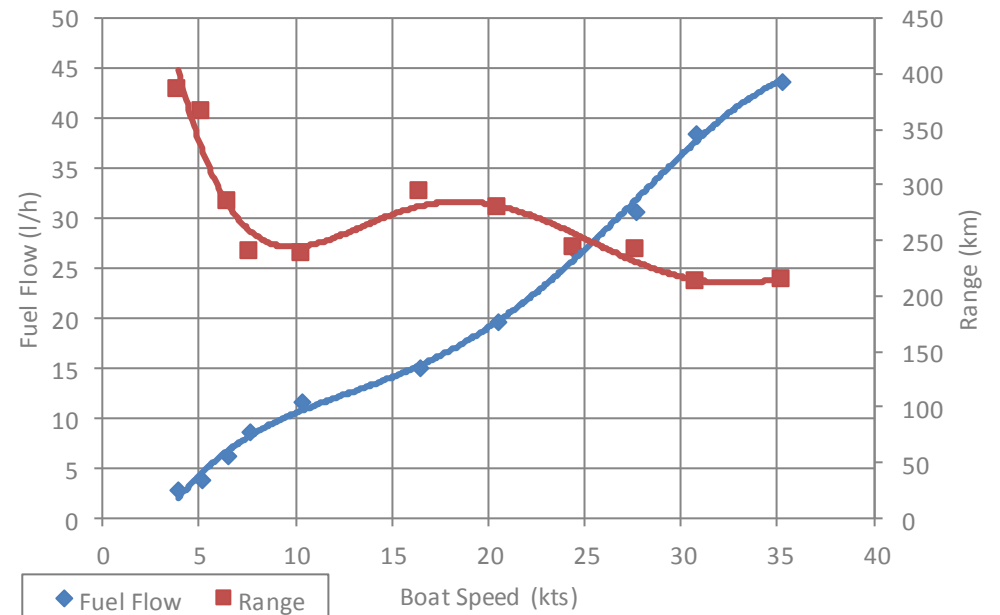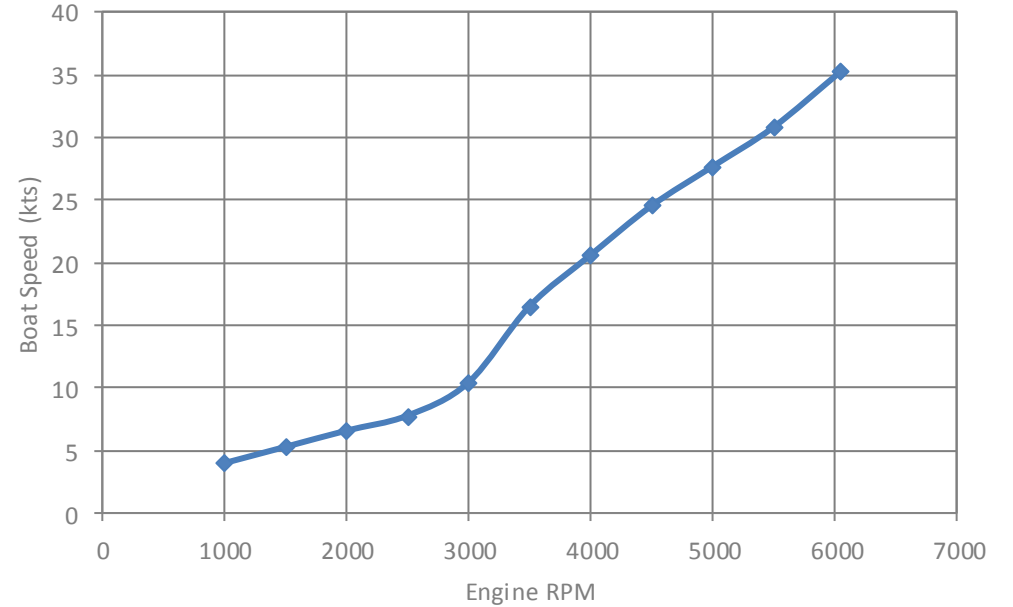

Model 605 Open  
 Engine(s) Mercury 150 Four Stroke  
 HP / kW 150 / 110  
 Gear Ratio 1.92:1  
 Propeller Enertia 14.7 x 16 x 3 BL SS  
 Propeller PN 898992A46

Dry Weight 1198 kg  
 Test Weight 1532 kg

| RPM  | Speed (kts) | Fuel Flow (l/h) | Range (km) |
|------|-------------|-----------------|------------|
| 1000 | 3.9         | 3.3             | 311        |
| 1500 | 5.6         | 5.2             | 287        |
| 2000 | 7.0         | 8.6             | 217        |
| 2500 | 9.2         | 12.1            | 202        |
| 3000 | 15.9        | 14.8            | 287        |
| 3500 | 21.5        | 18.5            | 309        |
| 4000 | 25.9        | 23.3            | 296        |
| 4350 | 28.9        | 27.2            | 283        |
| 4500 | 29.8        | 31.0            | 256        |
| 5000 | 33.7        | 38.9            | 231        |
| 5500 | 36.9        | 48.5            | 203        |
| 5850 | 39.0        | 55.0            | 189        |

Performance data provided for a boat in light load condition. Light load condition consists of a boat with typical options, full fuel, safety gear, and 2 people. Cruise speed based off of 75% maximum RPM. Cruise range is based on cruise speed, with 10% fuel reserve. The information is provided as a comparison guide and is to show relative performance between different engine options. A specific boat's performance will be affected by water and weather conditions, altitude, condition of the boat, actual load, and engine or propeller condition. Quicksilver® makes no guarantee that this performance will be repeated on this boat at a later date, or at any time on a similarly equipped boat.

